



CYLINDER MAGNETIC SENSORS

REED SENSOR SC SERIES

- Magnetic proximity sensor (Reed sensor)
- 10Watt, 10,000,000+ times use life.
- Different install sizes, NO, NC type.
- Can customized cable length, OEM, ODM supported.


Models	Dimension (D*L)	Max. currents	Max. voltage	Switching
SC0318-R	Φ3.8*18.6 mm	0.1A	24VDC	N.O.
SC0318-R2	Φ3.8*18.6 mm	0.1A	24VDC	N.C.
SC0415-R	Φ4*15 mm	0.1A	24VDC	N.O.
SC0415-R2	Φ4*15 mm	0.1A	24VDC	N.C.
SC0418-R	Φ4*18 mm	0.1A	24VDC	N.O.
SC0418-R2	Φ4*18 mm	0.1A	24VDC	N.C.
SC0515-R	Φ5*15 mm	0.1A	24VDC	N.O.
SC0515-R2	Φ5*15 mm	0.1A	24VDC	N.C.
SC0520-R	Φ5*20 mm	0.5A	100VDC	N.O.
SC0520-R2	Φ5*20 mm	0.5A	100VDC	N.C.
SC0525-R	Φ5*25 mm	0.5A	100VDC	N.O.
SC0525-R2	Φ5*25 mm	0.5A	100VDC	N.C.
SC0615-R	Φ6*15 mm	0.1A	24VDC	N.O.
SC0615-R2	Φ6*15 mm	0.1A	24VDC	N.C.
SC0620-R	Φ6*20 mm	0.5A	100VDC	N.O.
SC0620-R2	Φ6*20 mm	0.3A	100VDC	N.C.
SC0625-R	Φ6*25 mm	0.5A	100VDC	N.O.
SC0625-R2	Φ6*25 mm	0.3A	100VDC	N.C.
SC0630-R 50W	Φ6*30 mm	0.5A	300VDC	N.O.
SC0630-R2 30W	Φ6*30 mm	1.0A	127VDC	N.C.
SC0630-RC	Φ6*30 mm	0.3A	100VDC	N.O. & N.C.

* Can offer goods OEM & ODM services.

Note: * Specifications for Dia.6mm goods below

POWER	10Watts Max.
VOLTAGE	120VDC Max.
TEMPERATURE	100°C Max. (Customizable)
SENSING DISTANCE	≥ 15mm
BREAKDOWN	200VDC Max.
SWITCHING STATUS	Normally open or Normally closed
CURRENTS	0.5A
MATERIALS	ABS, PVC cable
PACKAGE	100pcs / bag
INSTALLATION	Flush type

PS.Goods offered with different size, specifications are customizable.

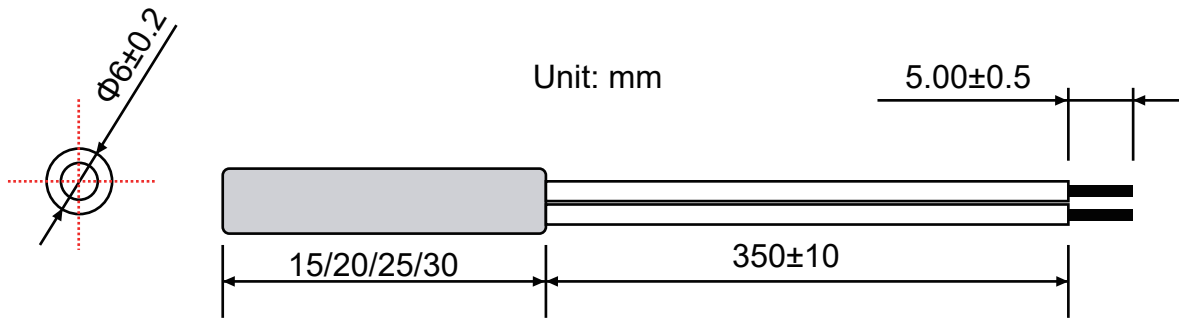

Cylinder sensor length can be 15mm, 20mm, 25mm ,30mm

Note: * Dimension for Dia.6mm goods above.